

NORDIC

Bottled Water Cooler



Models:

NOSA2STS1AC (Cook and Cold)

NOSA2SHS1AC (Hot and Cold)

Voltage: 100-115VAC 60Hz, single phase

Amp Draw:

Hot and Cold: 6.2 amps

Cook and Cold: 1.3 amps

Dimensions:

12.5"(D) X 13.0"(W) X 39"(H)

Net Weight (approx.):30 lbs.

Refrigerant Type: R134a

Refrigerant Charge: 1 oz




Crystal Mountain Products, Inc. • 915 Taylor Rd Unit 3 • Gahanna OH 43230

614.454.1618 • 614.866.7765 Fax • www.crystalcoolers.com

Copyright © 2025

PARTS DIAGRAM

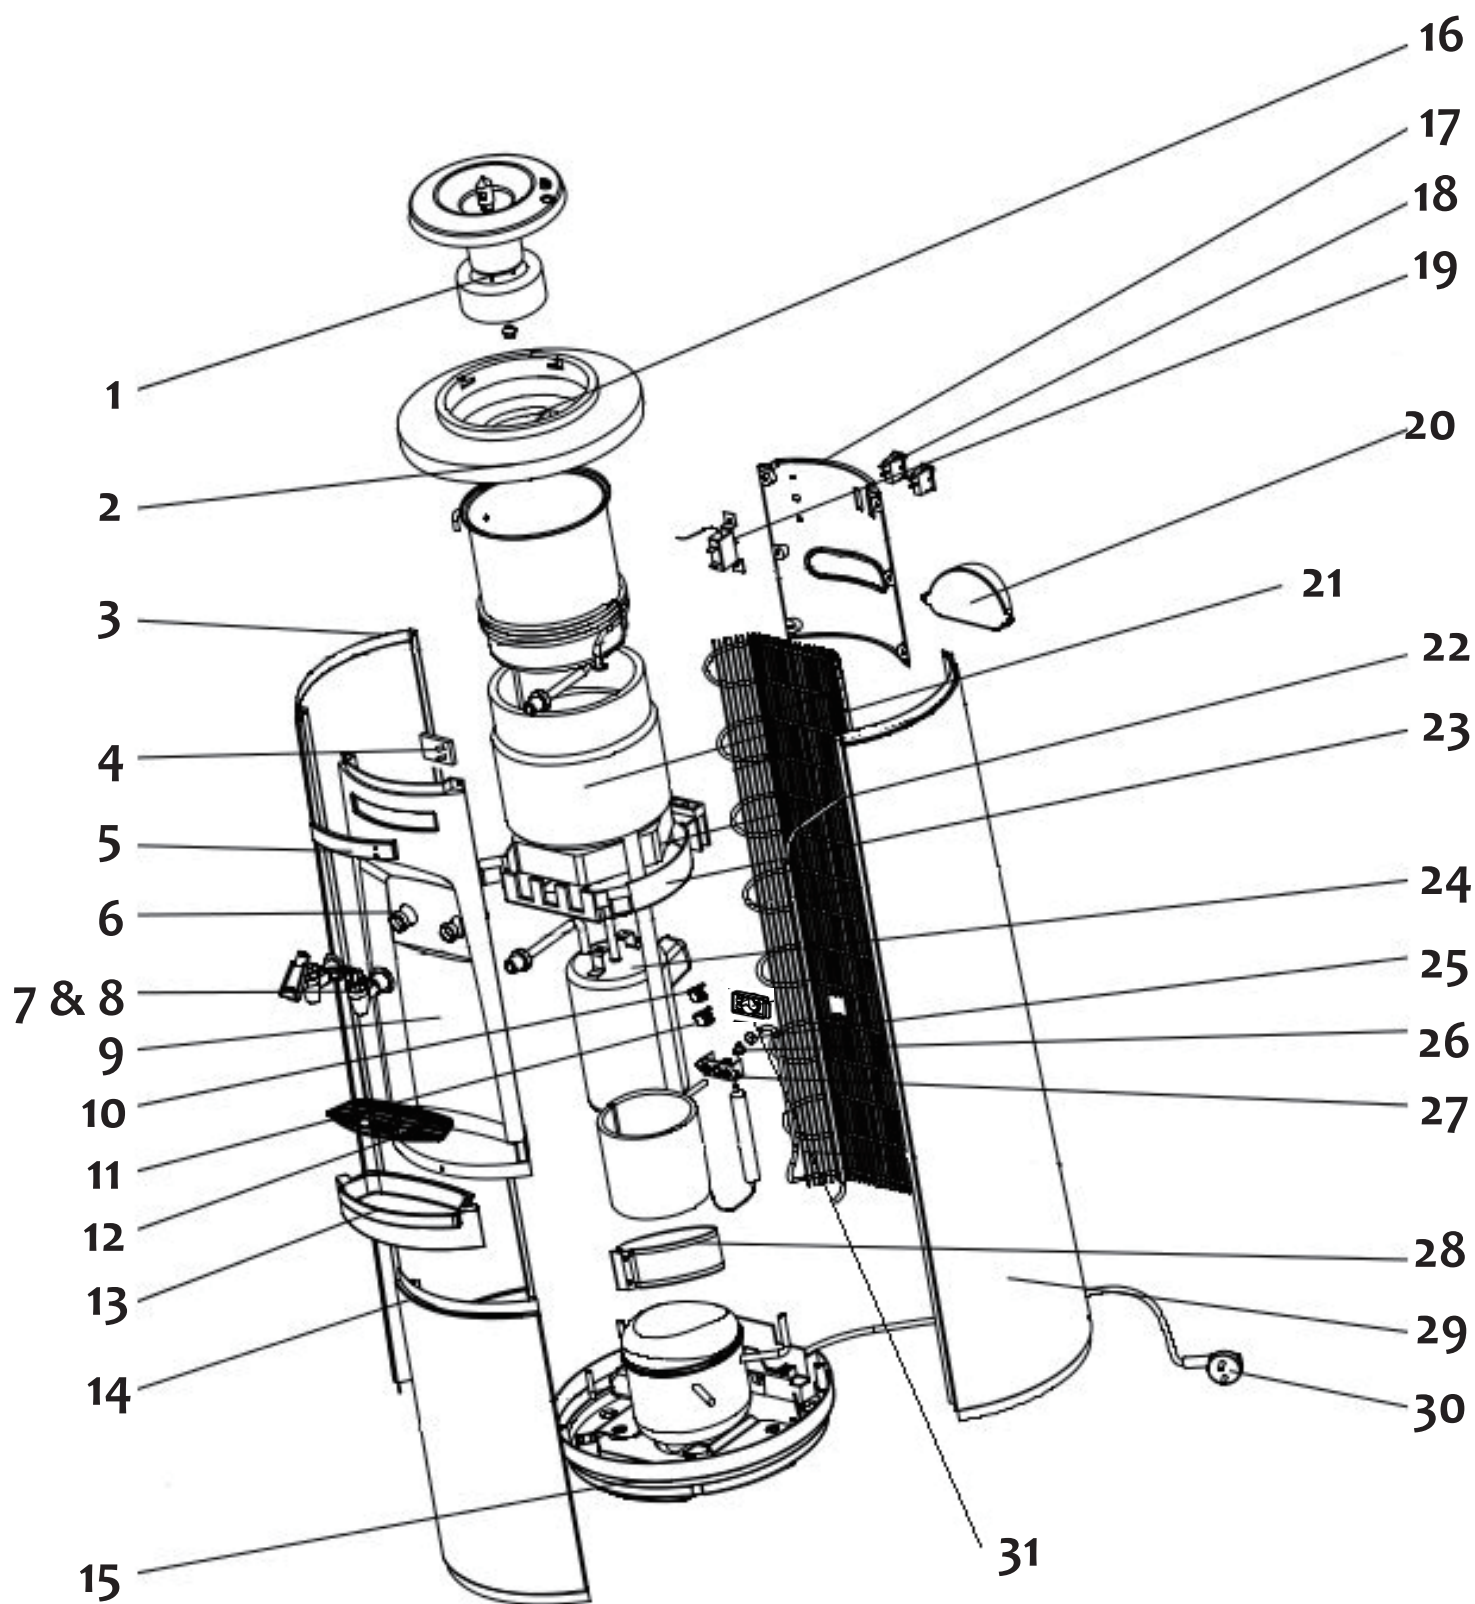

PARTS LISTING



	DESCRIPTION	NOSA2STS1AC	NOSA2SHS1AC
1	No Spill Assy, Blk Nordic	PLC-A300023	PLC-A300023
2	Top, Cabinet	PLC-A300013	PLC-A300013
3	Left Side Panel	SMT-A300008	SMT-A300008
4	PCB, LED Nordic	ELE-A300009	ELE-A300009
5	Trim Strip, Logo	LBL-A300001	LBL-A300001
6	Faucet Gasket	SIL-A300005	SIL-A300005
7	Faucet Assy, Blk/Whi	FAU-C 000020	N/A
	Faucet Assy, Blk/Red	N/A	FAU-C000063
8	Faucet Assy, Blk/Blk	FAU-C000004	FAU-C000004
9	Panel, Upper Front	PLC-A300014	PLC-A300014
10	Hot Thermostat	N/A	ELE-A300006
11	Limiter	N/A	ELE-A300007
12	Grill, Drip Tray	PLC-A300015	PLC-A300015
13	Drip Tray, Nordic	PLC-A300016	PLC-A300016
14	Panel, Lower Front	SMT-A300009	SMT-A300009
15	Base	PLC-A300017	PLC-A300017
16	Baffle, Screw-in, Nordic	PLC-A300018	PLC-A300018
17	Panel,Rear	PLC-A300019	PLC-A300019
18	Switch, Hot Tank Nordic	N/A	ELE-A300010
19	Cold Control, WPF 2E-L3	REF-A300004	REF-A300004
20	Handle	PLC-A300020	PLC-A300020
21	Reservoir Insulation, Nordic	REF-A300006	REF-A300006
22	Shelf Insulation, Nordic	REF-A300005	REF-A300005
23	Shelf, Evaporator	PLC-A300021	PLC-A300021
24	Hot Tank Assy, Nordic	N/A	SUB-C300002
25	Drain Cap	N/A	PLC-A300010
26	Drain Plug	N/A	SIL-A300004
27	Mounting Plate, HT Drain	N/A	PLC-A300022
28	Heater Band, Nordic	N/A	ELE-A300011
29	Right Side Panel, STN	SMT-A300010	SMT-A300010
30	Service Cord	ELE-A300012	ELE-A300012
31	Drain cover	N/A	PLC-C100405

Parts Not Shown


Relay	REF-A300007	REF-A300007
Overload	REF-A300008	REF-A300008

Installation


DRAIN COVER INSTALLATION

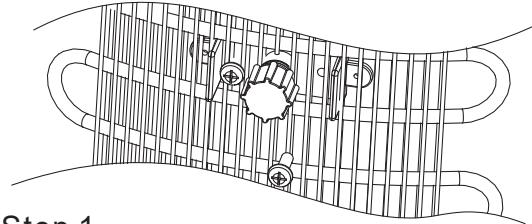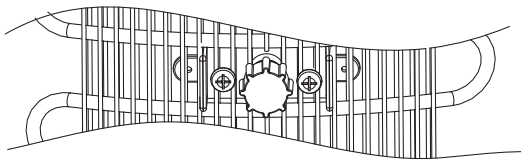

Step 1
- Take down the right side screw
(but keep the left side screw)

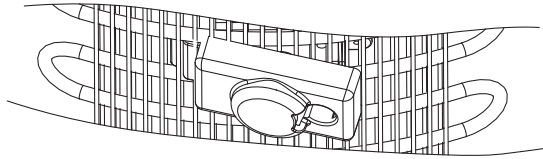

Step 2
- Install the Drain Cover (PLC-C100405)

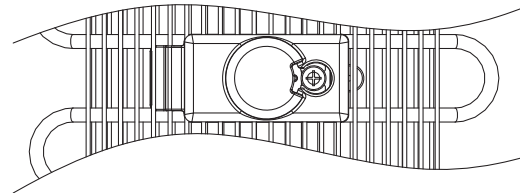

Step 3
- Install back the right side screw on


Note: Fastening torque of the screw is 4.5kgf.cm

SUB-C200773 20 Set Bulk Pack-Aspen/Nordic Drain Cover

SUB-C200774 100 Set Bulk Pack -Aspen/Nordic Drain Cover

WIRING DIAGRAM

NOSA2STS1AC

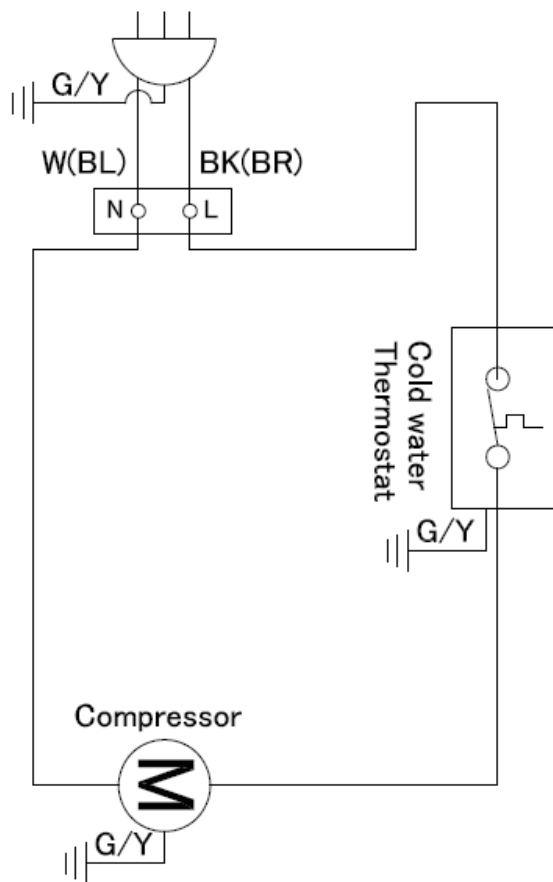

NOSA2SHS1AC

