


Service Bulletin

Storm Handle Replacement Instructions


Form 1702001



Using the access key, open the top of the watercooler by inserting it into the two small holes in the center above the faucets. Open the top. Locate the blue latch, unclamp and open it.

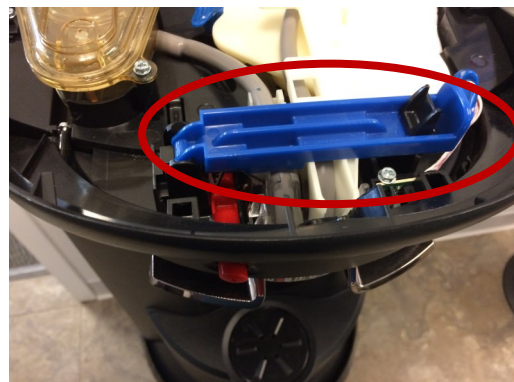

Locate and turn the blue locking clips so that the SmartFlo can be pulled up and rotated to the right so that it is out of the way. Locate and remove the transparent outlet between the faucet handles by gently pinching the tabs and pulling up and out of the way to the left.

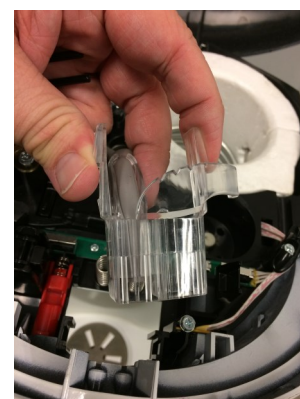


Crystal Mountain Products, Inc • 915 Taylor Rd, Unit 3 • Gahanna OH 43230

614.454.1618 • www.crystalcoolers.com


© 2017 Crystal Mountain Products Inc.

Storm Handle Replacement Instructions

To replace the faucet(s), remove the hinge pin by pushing down on the black tab on the left end of the hinge and pull the pin to the left until the handle pops up. The best tool for this is a pair of needle nosed pliers.

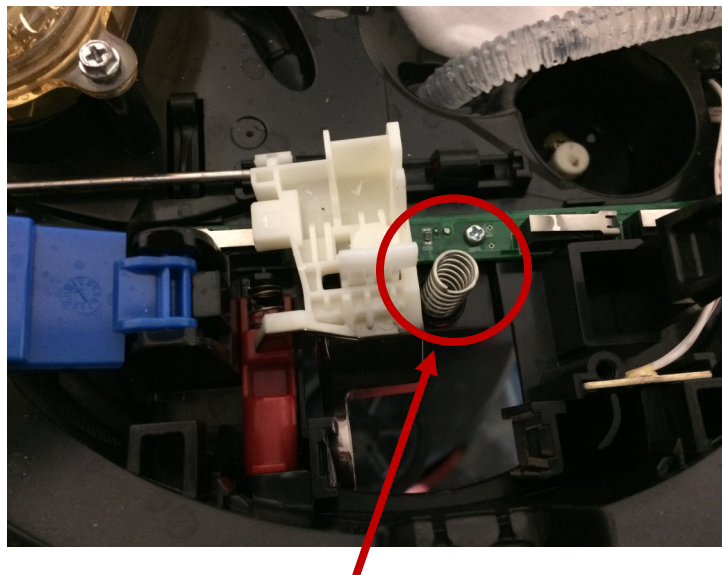

Pull the old handle up and out and insert the new one making sure to line up the spring underneath with the insert on the bottom of the handle. Slide the pin back into place.

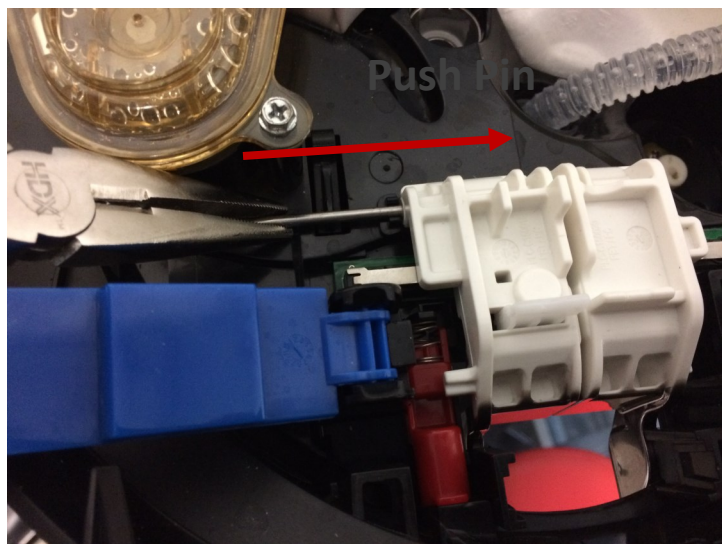

Put the clear outlet with the hot tube back into place. Turn the SmartFlo back into position and install into place. Turn the blue clips to lock it down and snap the latch into place. Close the cabinet top.

Crystal Mountain Products, Inc • 915 Taylor Rd, Unit 3 • Gahanna OH 43230

614.454.1618 • www.crystalcoolers.com

© 2017 Crystal Mountain Products Inc.